


# Dual Window wide band coupler

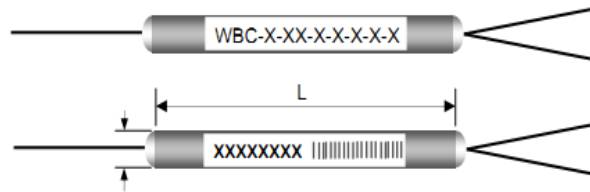

## Key Features

- ◆ Low excess loss
- ◆ Low PDL
- ◆ Dual operating window
- ◆ High Stability and Reliability
- ◆ Mini sizes

## Applications

- Long-haul Telecommunications
- Mini sizes transmitter/receiver module
- Optical communication systems
- Testing instruments

## Package Dimensions & Pigtail Style

Package Dimensions	
Package A(Mini)	2.4mm x 35mm stainless steel tube
Package A	3.0mm x 48mm stainless steel tube
Package B	3.0mm x 55mm stainless steel tube
Package C	90mm x16mm x 9mm case
Pigtail Style	
Package A	250μM bare fiber
Package B	900μM loose tube
Package C	900μM loose tube or 2mm/3mm cable

\*Other package dimensions can be made on customer request.

## Ordering Information

WBC-	x-	X2-	35-	XX-	X-	XX-	xx-	x
	P:Premium A:Grade A X: On request	12:1X2 22:2X2	35:1310/ 1550nm	01: 01:99 02: 02:98 ..... 50: 50:50	1: 1 meter x: on request	25:250μM Fiber 09:900μM loose Fiber	SC:SC/UPC SA:SC/APC  00:no connect	A: A B: B C:C
	Grade	Port number	Operation Wavelength	Coupling Ratio	Fiber length	Fiber type	Connect Type	Dimension

EX:WBC-P-12-35-50-1-09-00-B