

Multimode optical coupler


Key Features

- ✧ Low excess loss
- ✧ Uniform Power Splitting
- ✧ Rugged Package
- ✧ Excellent Environmental & Mechanical Stability
- ✧ NX4(n=1,2,4) NX8(n=1,2,8) port ratios are available.



Applications

- ✧ Long-haul Telecommunications
- ✧ Digital, Hybrid and AM-Video Systems
- ✧ High Speed Local Area Networks
- ✧ CATV System

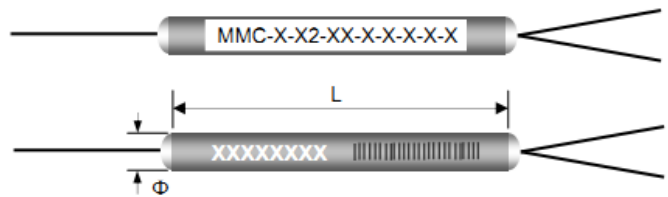

Package Dimensions & Pigtail Style

Package Dimensions	
Package A	3.0mm x 48mm stainless steel tube
Package B	3.0mm x 55mm stainless steel tube
Package C	90mm x16mm x 9mm case
Pigtail Style	
Package A	250μM bare fiber
Package B	900μM loose tube
Package C	900μM loose tube or 2mm/3mm cable

*Other package dimensions can be made on customer request.

Ordering Information

MMC-	x-	X2-	35-	XX-	X-	XX-	xx-	x
	P:Premium A:Grade A X: On request	12:1X2 22:2X2	85:850nm 31:1310NM	01: 01:99 02: 02:98 50: 50:50	1: 1 meter x: on request	25:250μM Fiber 09:900μM loose Fiber	SC:SC/UPC SA:SC/APC 00:no connect	A: A B: B C:C
	Grade	Port number	Operation Wavelength	coupling Ratio	Fiber length	Fiber type	Connect Type	Dimension

EX: MMC-P-12-31-50-1-25-00-A