

Single mode coupler (1X2 2X2)


Key Features

- ◆ Low excess loss
- ◆ Various Coupling Ratio
- ◆ Compact Size
- ◆ High Stability and Reliability
- ◆ Mini sizes



Applications

- ◆ Long-haul Telecommunications
- ◆ CATV
- ◆ FTTH
- ◆ Local Area Network

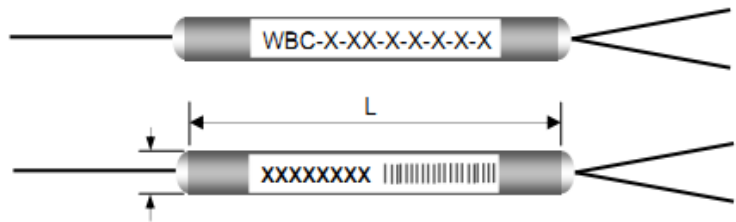

Package Dimensions & Pigtail Style

Package Dimensions	
Package A(Mini)	2.4mm x 35mm stainless steel tube
Package A	3.0mm x 48mm stainless steel tube
Package B	3.0mm x 55mm stainless steel tube
Package C	90mm x16mm x 9mm case
Pigtail Style	
Package A	250μM bare fiber
Package B	900μM loose tube
Package C	900μM loose tube or 2mm/3mm cable

*Other package dimensions can be made on customer request.

Ordering Information

WBC-	X-	X2-	XX-	XX-	X-	XX-	XX-	X
	P:Premium A:Grade A X: On request	12:1X2 22:2X2	31:1310nm 49:1490nm 55:1550nm 98: 980nm	01: 01:99 02: 02:98 50: 50:50	1: 1 meter x: on request	25:250μM Fiber 09:900μM loose Fiber 20: 2mm cable 30: 3mm cable	SC:SC/UPC SA:SC/APC 00:no connect	A: A B: B C:C
	Grade	Port number	Operation Wavelength	coupling Ratio	Fiber length	Fiber type	Connect Type	Dimension

EX: WBC-P-12-31-50-1-25-00-A